



TOP VIEW

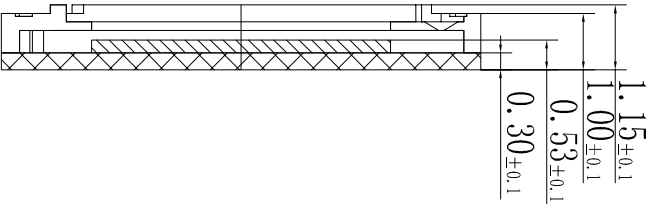

SIDE VIEW

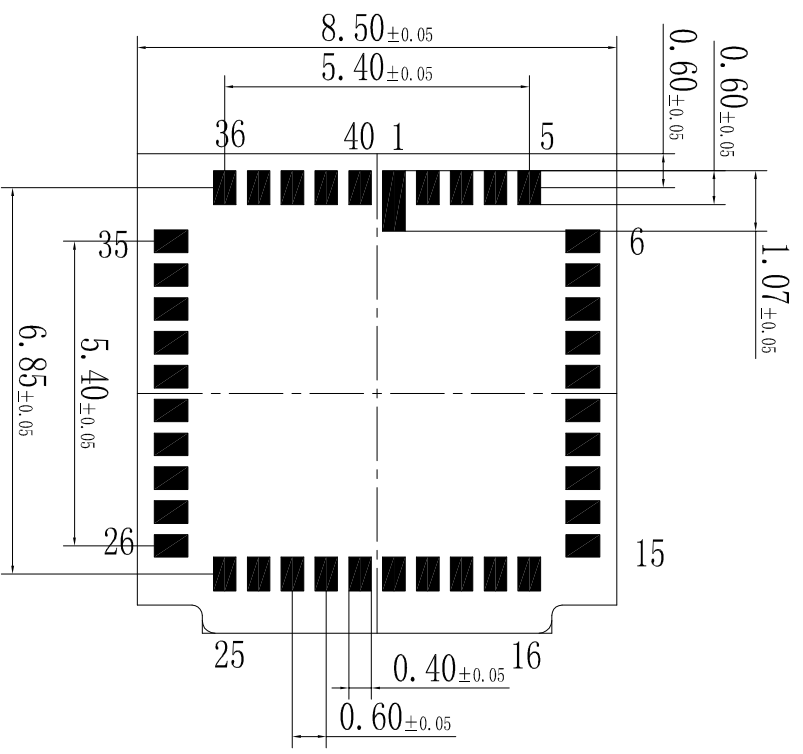

BOTTOM VIEW

PLCC parameter		感光芯片 (Chip Type)		遮光片 (IR TYPE)		650±10mm		1,		1.1		TOLERANCES		PART	
像素 (Array Size)		2608X1960		驱动 (Driver IC)		DM9714		1,		1.0		UNLESS OTHERWISE SPECIFIED		NO.	
镜头类型 (Lens Size)		1/4inch						2,		Preliminary outline design		±0.1		TYPE:	
模拟电路电压 (AVDD)		2.8V		马达 (VCM)				3,		DISCRPTION		CAMERA MODULE		SSK4EC PLCC 40Pin	
数字电路电压 (DVDD)		1.2V								BY		SCALE: 1:1		CUSTOMER	
接口电路电压 (DDVDD)		1.8V or 2.8V								DATE		mm		MODEL	
安微昌硕光电子 科技有限公司		Anhui JIangnan Industry area A5 building		APPROCALLS		Prepared by: _____ Checked by: _____ Approved by: _____		DATE: _____		ALL DIMENSIONS IN:		NO.		SHEET	
ChipPack		Tel:+86-566-3392899 Fax:+86-566-3392898								4		3		2	
										5		6		7	
										8		9		10	
										11		12		13	
										14		15		16	
										17		18		19	
										20		21		22	
										23		24		25	
										26		27		28	
										29		30		31	
										32		33		34	
										35		36		37	
										38		39		40	
										41		42		43	
										44		45		46	
										47		48		49	
										50		51		52	